


Mounting Instructions for DA4434

Introduction

The following mounting instruction shows the mounting on a Land Rover Discovery 3. Even for different models the mounting scheme is the same.

Dismount the engine cover.

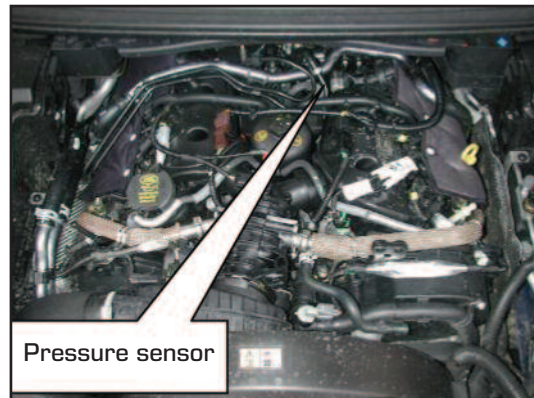


The Box is placed between the pressure sensor from the rail and the wiring loom from the engine.

The pressure sensor is located on the right side.



Dismount the connector from the pressure sensor.

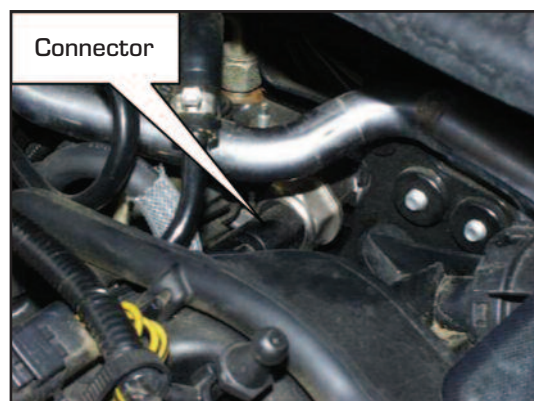

Place the connector from the PSI-Box over the sensor. Connect the male connector from the Box on the female connector from the wiring loom.

Place the unit on a secure place where there is not too much heat and on a dry place on the engine compartment.

The short black wire is to cut out the box when it is fitted to the ground via a switch

BRITPART

The quality parts for Land Rovers

Britpart

The Grove, Craven Arms,
Shropshire, SY7 8DB
United Kingdom

Email: sales@britpart.co.uk
www.britpart.com

Vr1