



## Discovery 1 Radiator Muff

1. Open bonnet.
2. Remove the three screws holding the front grill at the top.
3. Holding the radiator muff with the three brass grommets at the top place over the grill panel and fix down with the screws that were removed.

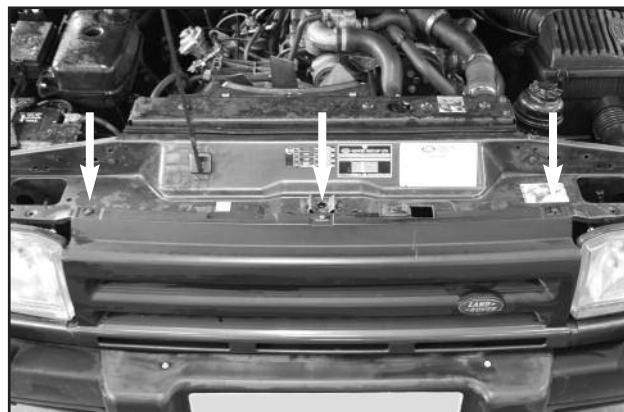

4. Using two zip ties thread them through the grommets in the bottom of the radiator muff and around the grill panel, do not tighten up at this point.

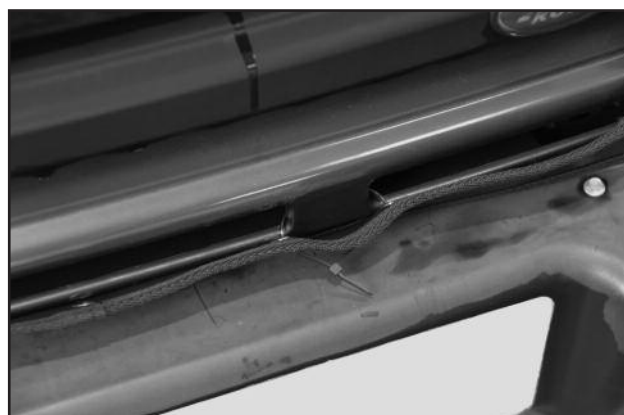

5. Thread zip tie through corner eyelet and hook through the corner of the grill, if open close and pop together the cover before tightening up the zip ties.

6. Tighten the outer ties first then the middle, do not over tighten or it will crease the radiator muff



### Important

This radiator muff is designed to help the engine warm up quicker during cold weather conditions, once the engine has reached operating temperature the cover must be opened to allow the cooling system to work properly and prevent overheating.